

- Excellent mechanical strength
- Excellent abrasion resistance
- Excellent optical clarity
- Environmental sealing
- Shrink ratio 4:1

DWTC

Flexible, dual wall, moisture proof, heat-shrinkable tubing

Raychem

Raychem DWTC is a flexible, heat-shrinkable, dual wall tubing with an integrally bonded meltable adhesive inner liner designed to offer moisture proof encapsulation to a wide variety of substrates. Available in clear, DWTC


offers excellent clarity for protection of substrates that may need to be inspected during service. The tough outer jacket gives excellent mechanical strength with a high resistance to splitting.

The high shrinkage ratio means that only four sizes are needed to give protection to a full range of irregular shapes with widely varying dimensions.

Temperature rating

Operating temperature range	-55°C to +75°C
Minimum recovery temperature	+100°C

Ordering information

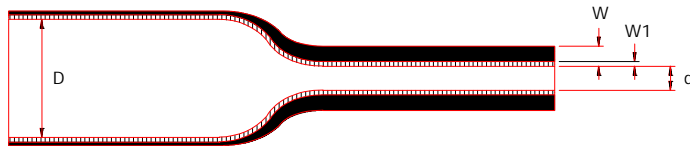

Inside diameter		Wall thickness		Standard package	
D (min) Expanded as supplied	d (max) Recovered after heating	W (nom) Total wall recovered after heating	W1 (nom) Meltable wall recovered after heating	1.22m length quantity	Ordering description
mm	mm	mm	mm	m	
4.0	1.0	0.8	0.25	30	DWTC-4/1-X
8.0	2.0	0.9	0.25	30	DWTC-8/2-X
12.0	3.0	1.2	0.40	30	DWTC-12/3-X
16.0	4.0	1.5	0.50	30	DWTC-16/4-X

The largest size that will recover snugly over the component to be covered should be ordered.
The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.
Other lengths and sizes are available subject to special order.

Standard colours

Colour	Clear
Code	X

DWTC

Performance

Test	Test method	Test requirement
Tensile strength:	ISO 37	20 MPa (min)
Ultimate elongation:	ISO 37	250% (min)
Inner wall adhesion: DWTC to aluminium		60 N/25 mm (min)
Heat shock:	4 h at 200°C	Pass - no dripping, cracking or flowing of outer wall
Heat ageing:	168 h at 120°C	Pass - no dripping, cracking or flowing of outer wall
Low temperature flexibility:	4 h at -55°C	Pass - no cracking
Dielectric strength:	IEC 243	20 MV/m (min)
Fluid resistance:	24 h at 23°C, ISO 37	Tensile strength: 15 MPa (min) Ultimate elongation: 200% (min)
	Test fluids:	Diesel fuel (BS 2869 Class A1) Hydraulic fluid (H-515) Lubricating oil (O-149)

For full product performance details consult Raychem Specification RK 6204.

Specifications

Raychem Specification RK 6204.

Installation instructions available on request.

Material Safety Data Sheet available on request.

Raychem and DWTC are trademarks of Tyco Electronics Corporation.

All of the above information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics makes no warranties as to the accuracy or completeness of the information and disclaims any liability regarding its use. Tyco Electronics only obligations are those in the Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising from the sale, resale, use or misuse of the product. Tyco Electronics Specifications are subject to change without notice. In addition Tyco Electronics reserves the right to make changes in materials or processing, without notification to the Buyer, which do not affect compliance with any applicable specification.

Tyco/Electronics/Raychem
306 Constitution Drive
Menlo Park, CA 94025
U.S.A
Tel: (650)-361 3333

Tyco/Electronics/Raychem
Cheney Manor Industrial Estate
Swindon, Wiltshire SN2 2QE
UK
Tel: (44)-1793 573762

Tyco/Electronics/Raychem
3816 Noborito, Tama-ku
Kawasaki 214-8533
Japan
Tel: (81)-44 9005102

Tyco/Electronics/Raychem
No. 26 Ang Mo Kio Ind. Park
Singapore 569507
Tel: (65)-4866151